




P.O. Box 245013 • Milwaukee, WI 53224 • (800) 776-7192 • www.sharecorp.com

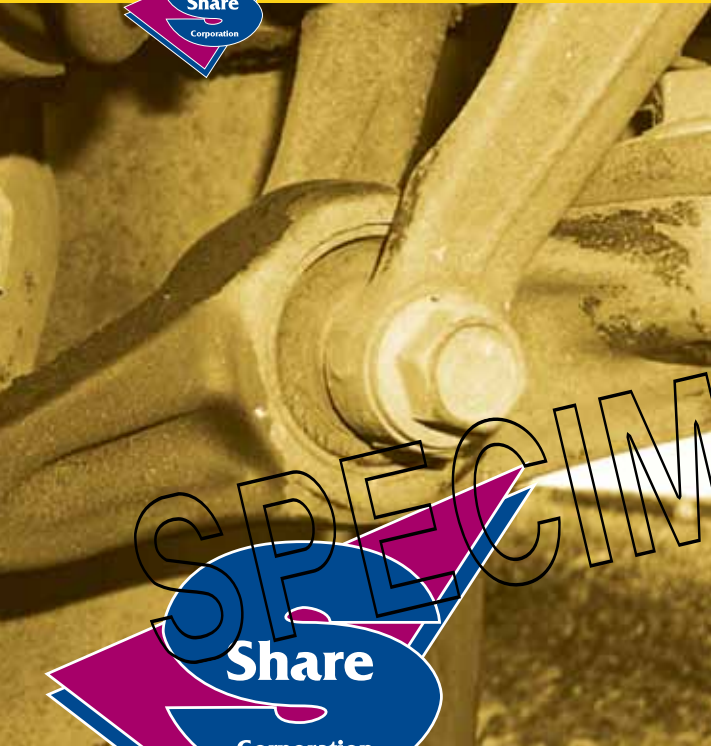


SUPER IMPACT GREASE is specially formulated to withstand extreme pressures associated with heavy impact, yet maintains good shear stability and long life. The special thickener gives **SUPER IMPACT GREASE** the ability to withstand high temperatures without melting or running like other conventional greases.

Great for use in:

- Oil rigs
- Construction
- Mining
- Agriculture
- Logging
- Automotive

Provides Protection for:

- Vehicle drive lines
- Chassis points
- Fifth wheels
- Ball joints
- Wheel bearings (even with disc brakes)



SPECIMEN LABEL

TYPICAL SPECIFICATIONS

NLGI Grade	2
Color	Green or Blue
Thickener Type	Calcium Sulfonate Complex
Viscosity @ 40°C, cSt	220
Viscosity Index	97
Penetration Worked	265-295
Dropping Point (°F)	+550
Timken OK Load (lbs)	65
Weld Load, kg, ASTM D 2596	620
Load Wear Index	65
Wheel Bearing Leakage	5.0 MAX
Water Washout @ 175°F, % wt.	3.0



1846•101512

Super Impact Grease

Heavy Duty Resistant Grease

NET WT. 15 OZ.